
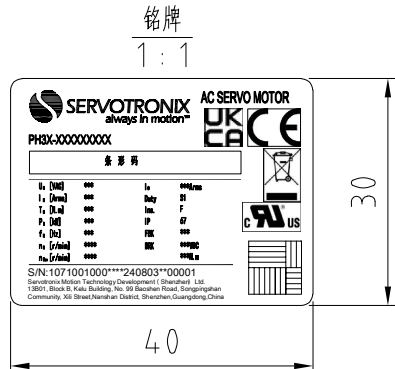
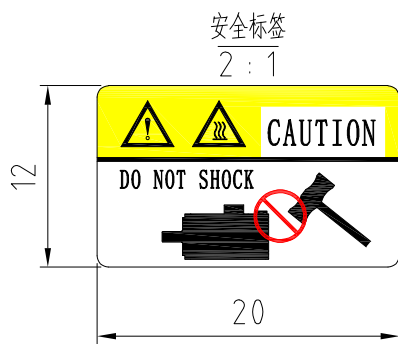
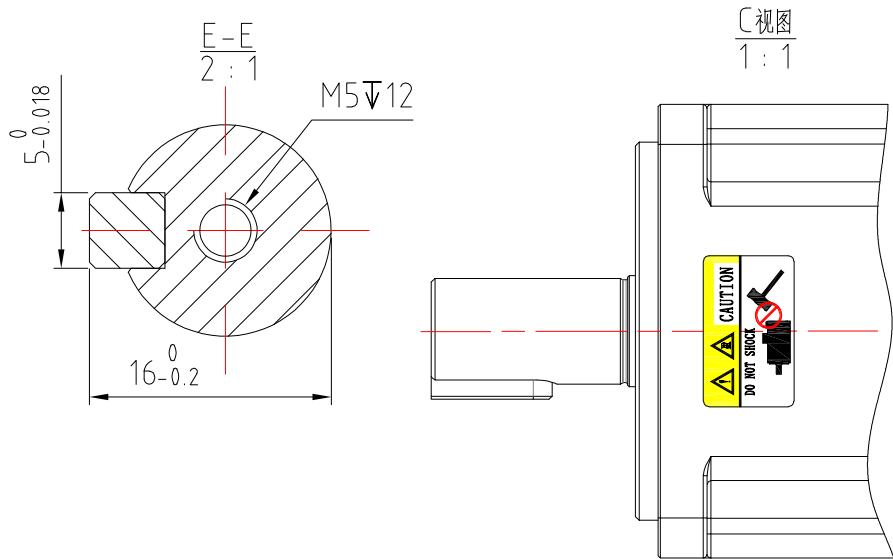


	1	2	3	4	5	6	7	8
本文件含有美的集团的保密信息,禁止任何人未经授权以任何形式使用(包括但不限于全部或部分地泄露、复制、或散发)								【秘密】
※※								

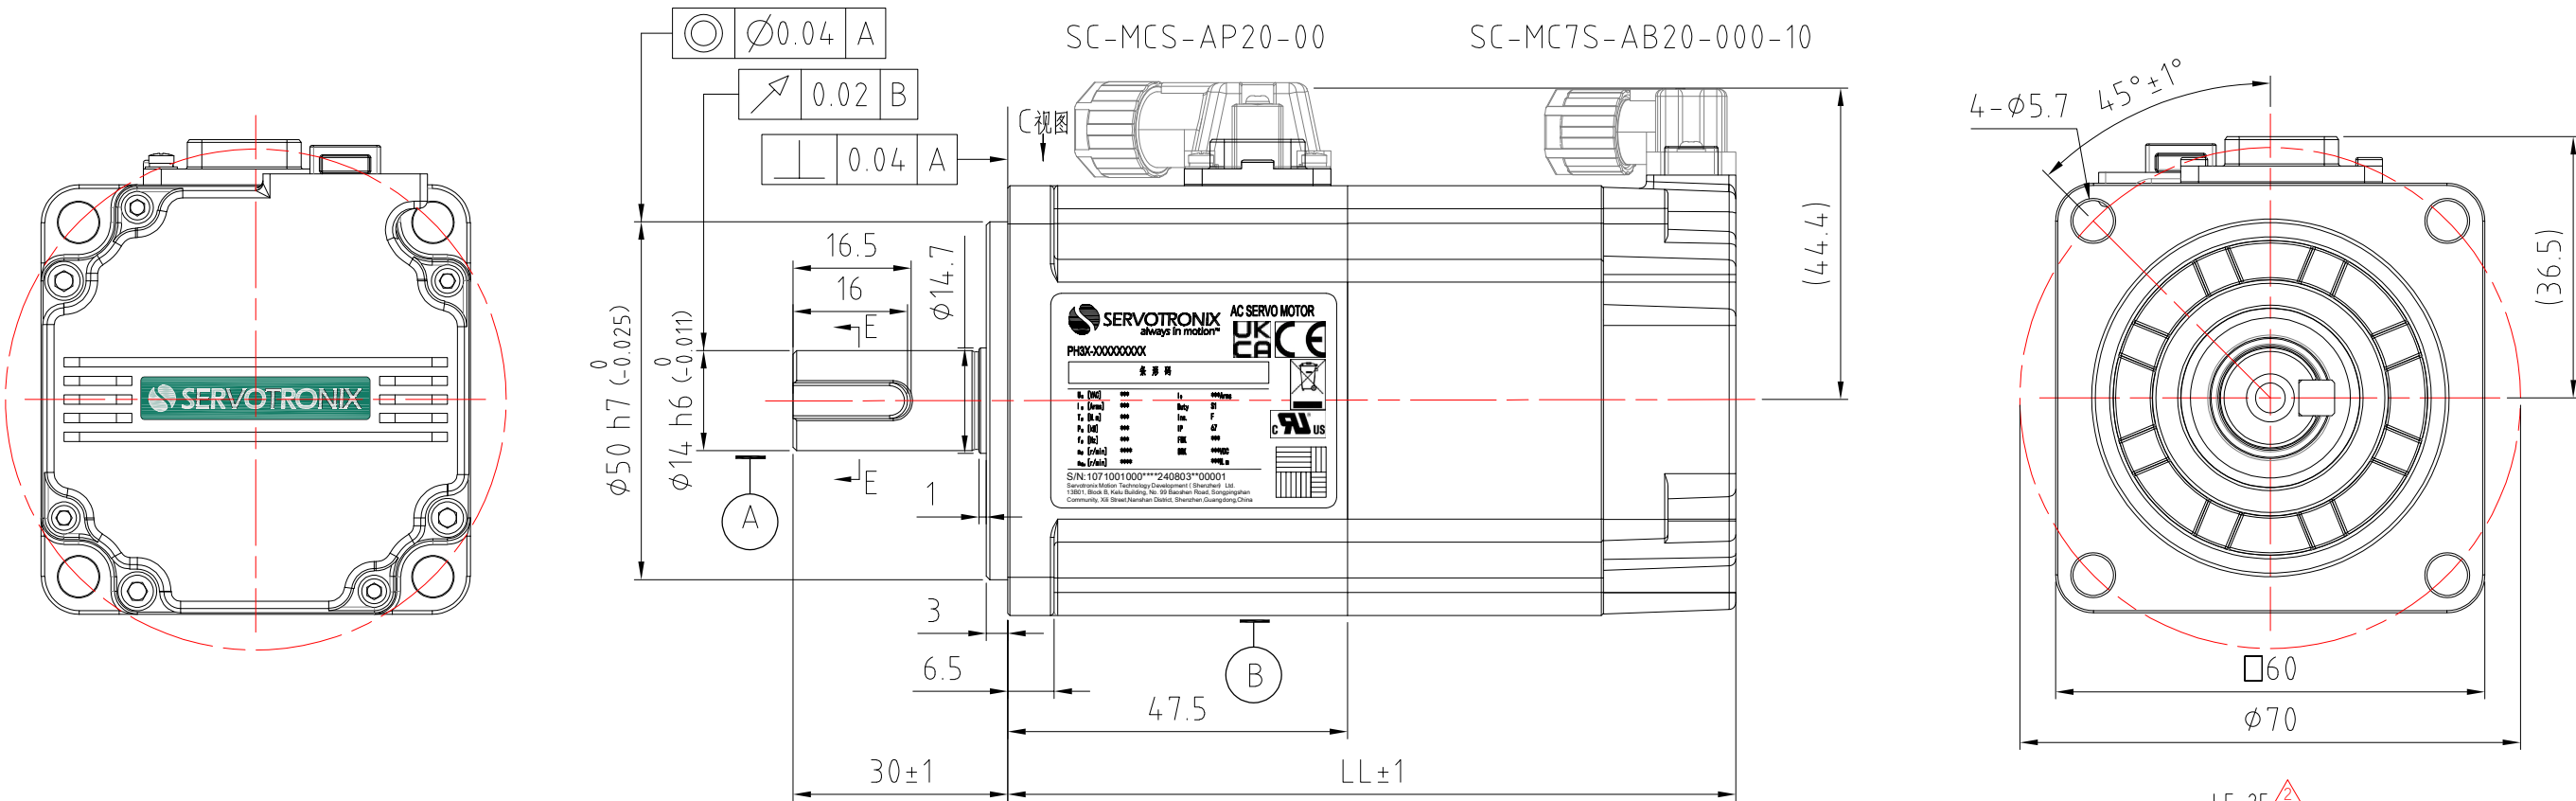

接线定义

插头型号	信号
SC-MC7P-AB20-00	
1	PE
2	5V
3	0V
4	SD+
5	SD-
6	BAT+
7	BAT-

接线定义

插头型号	信号
SC-MC6P-AP2G-044	
1	U
2	V
3	W
4	PE
A	24VDC
B	24VGND

交流伺服电机:

LL(mm)	类型	图号/零件代码	料号	编码器
69.3	标准款	PH3E-M02A006SG	10710010003986	20bit 单圈磁编
		PH3E-M02A006SM	10710010003966	20bit 多圈磁编
		PH3S-M02A006ST	10710010003985	23bit 多圈光编
101.8	制动款	PH3E-M02A006EG	10710010003965	20bit 单圈磁编
		PH3E-M02A006EM	10710010003967	20bit 多圈磁编
		PH3S-M02A006ET	10710010003988	23bit 多圈光编

REVISION						APPROVED BY	徐军	DATE	2025.3.3	PROJECT. 项目名称	M02A006电机
						PROCESS	黄明达	DATE	2025.3.3	TITLE. 名称	
	△	模板标准化：动力接线定义：A/24VDC,B/24VGND; LF=25			余远航	2025.11.3	工艺			电机外形图	
	△	初版发布			余远航	2025.3.3					
	序号	变更内容			变更人	日期	CHECKED BY	李修近	DATE		2025.3.3
			重要尺寸：☆	材料	/	审核/校对		DATE	2025.3.3	DWG. No. 图号	
			单位：mm	重量	/	DESIGNED BY	余远航	DATE	2025.3.3	PH3*-M02A006**	
			页码：2/2	视角		设计					
			比例：1/1								