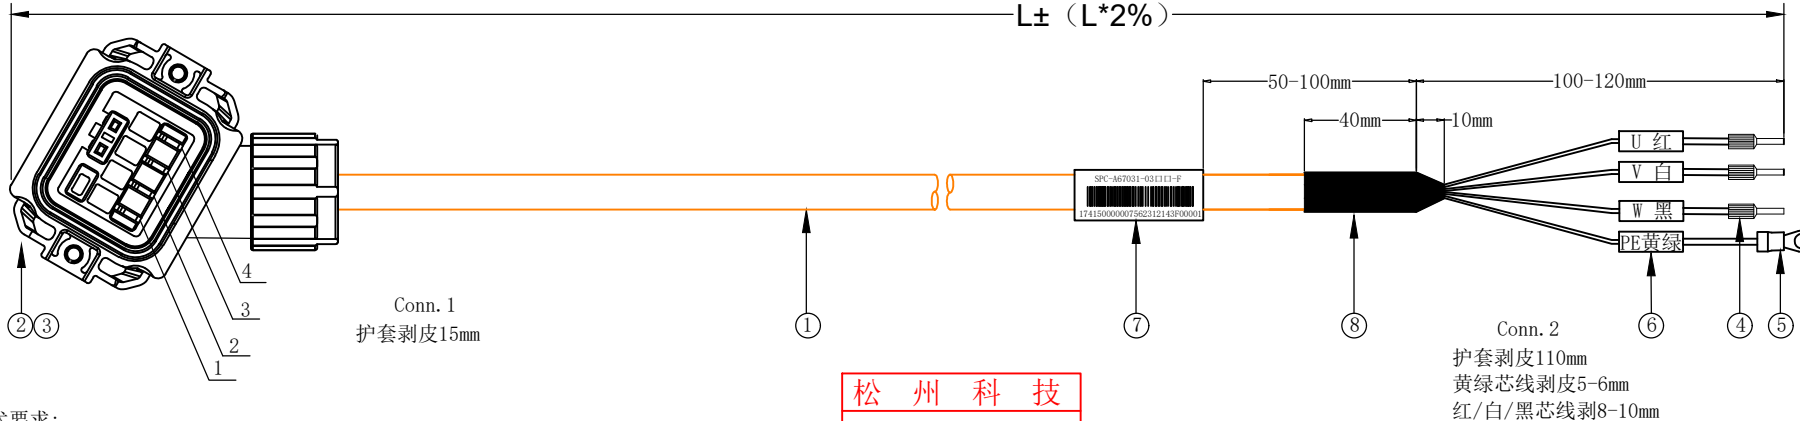


1		2		3		4		5		6		7		8																																																															
高创通用	长度 (L)	裁线长度	放线误差	REV ZONE LTR DESCRIPTION DATE REVISOR 0 正式发行 12/26/24 Lian																																																																									
	L	依订单长度	L±0.2%mm																																																																										
型号: SPC-A67031-03口口-F																																																																													
005:0.5M/ 01:1M/ 10:10M L± (L*2%)																																																																													
																																																																													
技术要求: 1、成品百分百测试断短路, 误配; 2、导通阻抗: MAX 3Ω; 3、绝缘阻抗: ≥20MΩ, DC 500V/10S; 4、AC耐压: 500V/10S;漏电流: MAX 3mA; 5、未注公差尺寸: ±5.0mm, 总线长正公差不管控。																																																																													
<table><caption>不同米数型号物料号对照表</caption><tr><th>料号</th><th>型号</th><th>长度</th></tr><tr><td></td><td>SPC-A67031-0303-F</td><td>3米</td></tr><tr><td></td><td>SPC-A67031-0305-F</td><td>5米</td></tr><tr><td></td><td>SPC-A67031-0310-F</td><td>10米</td></tr><tr><td></td><td>SPC-A67031-0315-F</td><td>15米</td></tr><tr><td></td><td>SPC-A67031-0320-F</td><td>20米</td></tr></table> SPC-A67031-03口口-F 000000000000002312143F00001 序列号: 依次增加 3F: 松州 生产日期 产品物料号 Conn. 1 (SC-MC6S-AP20-00) Conn. 2 (散线侧套脚位定义号码管) 红 2 U 红 E0508棒型端子 (红色) 白 1 V 白 E0508棒型端子 (红色) 黑 3 W 黑 E0508棒型端子 (红色) 黄绿 4 PE 黄绿 RV1.25-4S 0型端子 (蓝色)															料号	型号	长度		SPC-A67031-0303-F	3米		SPC-A67031-0305-F	5米		SPC-A67031-0310-F	10米		SPC-A67031-0315-F	15米		SPC-A67031-0320-F	20米																																													
料号	型号	长度																																																																											
	SPC-A67031-0303-F	3米																																																																											
	SPC-A67031-0305-F	5米																																																																											
	SPC-A67031-0310-F	10米																																																																											
	SPC-A67031-0315-F	15米																																																																											
	SPC-A67031-0320-F	20米																																																																											
材料信息表: <table><tr><th>序号</th><th>名称</th><th>数量</th><th>单位</th><th>料号</th><th>规格描述</th><th>备注</th></tr><tr><td>1</td><td>线材</td><td>L</td><td>M</td><td>FD800YY NY 4C×20AWG 橙</td><td>4芯拖链线 CE RoHS E517847 兄 AWM STYLE 2517 105℃ 300V VW-1 PVC橙色外被 耐油100℃x96h (UL758) OD:6.2±0.2mm 红/白/黑/黄绿</td><td>标柔线</td></tr><tr><td>2</td><td>连接器</td><td>1</td><td>PCS</td><td>SC-MC6S-AP20-00</td><td>12119400001344,MC动力插头</td><td>三竹</td></tr><tr><td>3</td><td>反向端子</td><td>4</td><td>PCS</td><td>S-FMCK6092220</td><td>12219400000581, 反向端子, 只用于后出线</td><td>三竹</td></tr><tr><td>4</td><td>端子</td><td>3</td><td>PCS</td><td>E0508</td><td>红色绝缘端子 针型 适用导体0.5mm² 管长8.0mm</td><td>红色</td></tr><tr><td>5</td><td>端子</td><td>1</td><td>PCS</td><td>RV1.25-4S</td><td>绝缘端子 圆形 适用导体1.25mm² 螺栓口径4.0mm 哑锡</td><td>蓝色</td></tr><tr><td>6</td><td>号码管</td><td>4</td><td>PCS</td><td>X-HMG0-3.0-20</td><td>直径3.0mm 白色 单根长度20mm 高度4.2mm</td><td></td></tr><tr><td>7</td><td>标签</td><td>1</td><td>PCS</td><td>CG-XLBQ-44*46</td><td>线缆标签44*46 自粘型 卷装</td><td></td></tr><tr><td>8</td><td>热缩管</td><td>1</td><td>PCS</td><td>X-B-RSGH10-50</td><td>黑色 直径10mm 长度50mm</td><td></td></tr></table>															序号	名称	数量	单位	料号	规格描述	备注	1	线材	L	M	FD800YY NY 4C×20AWG 橙	4芯拖链线 CE RoHS E517847 兄 AWM STYLE 2517 105℃ 300V VW-1 PVC橙色外被 耐油100℃x96h (UL758) OD:6.2±0.2mm 红/白/黑/黄绿	标柔线	2	连接器	1	PCS	SC-MC6S-AP20-00	12119400001344,MC动力插头	三竹	3	反向端子	4	PCS	S-FMCK6092220	12219400000581, 反向端子, 只用于后出线	三竹	4	端子	3	PCS	E0508	红色绝缘端子 针型 适用导体0.5mm² 管长8.0mm	红色	5	端子	1	PCS	RV1.25-4S	绝缘端子 圆形 适用导体1.25mm² 螺栓口径4.0mm 哑锡	蓝色	6	号码管	4	PCS	X-HMG0-3.0-20	直径3.0mm 白色 单根长度20mm 高度4.2mm		7	标签	1	PCS	CG-XLBQ-44*46	线缆标签44*46 自粘型 卷装		8	热缩管	1	PCS	X-B-RSGH10-50	黑色 直径10mm 长度50mm	
序号	名称	数量	单位	料号	规格描述	备注																																																																							
1	线材	L	M	FD800YY NY 4C×20AWG 橙	4芯拖链线 CE RoHS E517847 兄 AWM STYLE 2517 105℃ 300V VW-1 PVC橙色外被 耐油100℃x96h (UL758) OD:6.2±0.2mm 红/白/黑/黄绿	标柔线																																																																							
2	连接器	1	PCS	SC-MC6S-AP20-00	12119400001344,MC动力插头	三竹																																																																							
3	反向端子	4	PCS	S-FMCK6092220	12219400000581, 反向端子, 只用于后出线	三竹																																																																							
4	端子	3	PCS	E0508	红色绝缘端子 针型 适用导体0.5mm² 管长8.0mm	红色																																																																							
5	端子	1	PCS	RV1.25-4S	绝缘端子 圆形 适用导体1.25mm² 螺栓口径4.0mm 哑锡	蓝色																																																																							
6	号码管	4	PCS	X-HMG0-3.0-20	直径3.0mm 白色 单根长度20mm 高度4.2mm																																																																								
7	标签	1	PCS	CG-XLBQ-44*46	线缆标签44*46 自粘型 卷装																																																																								
8	热缩管	1	PCS	X-B-RSGH10-50	黑色 直径10mm 长度50mm																																																																								